

FLOORING COATINGS

PRODUCT CATALOG

Durable Solutions
for Industrial and
Commercial Floors



HIGH
PERFORMANCE



DURABLE
& LONG LASTING



WIDE
APPLICATION




PROFESSIONAL
SOLUTION

Typical Properties


Compressive Strength	:	80 N/mm ²
Flexural Strength in Tension	:	30 N/mm ²
Adhesion to Concrete	:	>3 N/mm ²
Modulus of Elasticity	:	9000 N/mm ²
Application Temperature	:	10°C 35°C
Electrical Resistance	:	10 ¹² Ω

Step of Application

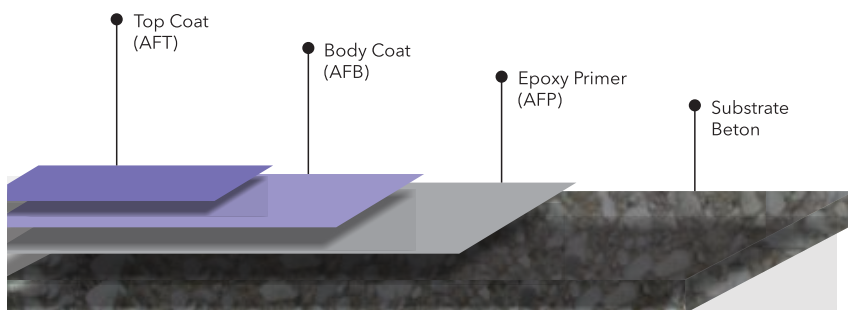

Chemical Resistance

HCL 10%	: Good	CH3COOH 10%	: Fair	HCOOH 20%	: Fair
HCL 20%	: Good	CH3COOH 20%	: Fair	H3PO4 10%	: Fair
HCL 30%	: Good	HNO3 10%	: Fair	NaClO	: Fair
NaOH 36%	: Fair	HNO3 20%	: Fair	C2H5OH 10%	: Fair
NaOH 10%	: Good	NH3 15%	: Good	C2H5OH 20%	: Fair
NaOH 20%	: Good	NH3 27%	: Good	C2H5OH 50%	: Fair
NaOH 50%	: Good	H2SO4 10%	: Good	C2H5OH 70%	: Fair
NaOH 100%	: Good	H2SO4 20%	: Good	C2H5OH 98%	: Fair
NaCl 50%	: Good	H2SO4 40%	: Fair	Bensin	: Good
NaCl 100%	: Good	H2SO4 60%	: Fair	Xylene	: Fair
H2O2	: Good	H2SO4 80%	: Fair	Toluene	: Good
		H2SO4 98%	: Fair	Acetone	: Fair
		HCOOH 10%	: Fair	Butyl Acetate	: Fair



White



Light Blue



Yellow Green



Ivory



Blue Purple



Leaf Green



Grey



Traffic Blue



Dark Green



Light Grey



Victoria



Traffic Yellow



Light Alabaster



Mint Green



Geranium

INDUSTRIAL
COMMERCIAL
FOOD & BEVERAGE
WAREHOUSE
PARKING AREA
AND MORE

BASITAP**PAINT**

HIGH PERFORMANCE POLYMER FLOORING

**"Durable Solutions
for Industrial and Commercial Floors"**



**HIGH
PERFORMANCE**



**DURABLE
& LONG LASTING**



**WIDE
APPLICATION**



**PROFESSIONAL
SOLUTION**

BASITAPAIN INDONESIA



Jakarta Barat, Indonesia



0811-8677-782



www.basitapaint.com